


ELIPSE® HALF-FACE MASK + HESPA™ A2P3 DUST (R) Filters



Particulate plated filter
570 mm; length of actual media in
each filter (70 mm large)

Activated carbon
treated for gas
adsorption

Structure to help
airflow diffusion
and full usage of
the activated
carbon

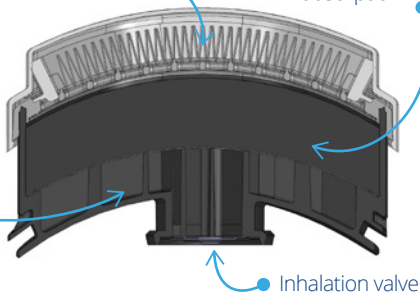

Inhalation valve



Standards

EN140: 1998 Mask Body
EN14387: 2004 + A1: 2008 A2P3 R D
CE 2797

Efficiency

P3 >99,95% for 0,3 μ particulate
At 5000 ppm:
Cyclohexane (C₆H₁₂) > 35 minutes

Shelf Live

3 years (mask & filters) See storage conditions on Instructions for Use.
Filters are re-usable and changeable.

Weight

Mask + Filter: net (S/M) 334 g; (M/L) 342 g
gross (S/M) 435 g; (M/L) 443 g
Filter: net 121 g each; both net 242 g, gross 265 g

Material

- **Mask:** Medical grade TPE Conforms to ISO 10993-10: 2010 for irritations. Mask body latex and silicone free, odour free. Valve Body in Nylon, Inhalation/Exhalation diaphragm in Silicone. 4 point adjustable elasticated head and neck strap with comfort pad in TPE.
- **Gas Filters:** Activated carbon sealed into a ABS Shell.
- **Particulate filters:** Mechanical type multi-layer HESPA Synthetic media with TPE flexible overmolded / encapsulated. Particulate filters are integrated with the carbon element.

Production

United Kingdom, Italy, Romania
100% of filters NaCl Tested



| Code | Description | Quantity |
|------------------------------|---|--------------------------|
| SPR495 (S/M) SPR496 (M/L) | A2P3 Reusable Half Mask for multiple Gases and Vapours and Dust | 8 pcs. per box |
| SPR497 | A2P3 replacement filters | 5 sets of 2 pcs. per box |
| SPM009 | Elipse High efficiency Mask Carry Case (Belt holder) | 10 sets per box |

Applications - Universal gases, dust, mist and fumes



Welding

Metal Fumes and Dust in confined space (gas welding)



Construction

Paint, Moulds.



Car & Ship Repair

Epoxyte, Paint, Solvents



Manufacturing

Solvents, various Organic Gases



Agriculture

Pesticides