SUPERTOUCH

CUSTOMER INFORMATION

Hi Vis Trousers

Description:

Our Hi Vis Trousers are perfect for working out-of-doors. The water resistant material combined with a generous fit means that these trousers can protect both you and your clothes from the wind and rain.

- Conforms to EN ISO 20471 Class 1 (HV versions only)
- Conforms to GO/RT 3279 (Orange version only)
- Conforms to EN 343 Class 3:1 (HV versions only)
- 2 bands on each leg
- Elasticated waistband

Fabric:

- 300D Oxford PU fabric

Applications:

Tasks with a hi-vis requirement – traffic, security, event marshalling, driving, construction, roadworks, wet weather tasks. Rail/underground (Orange version only)

Washcare Symbols:

40°				
Wash cycle	Do not bleach	Do not tumble dry	Do not iron	Do not dry clean

Product Codes:

18541-7	S - 4XL	Hi Vis Yellow - Ankle Band
18581-7	S - 4XL	Hi Vis Orange - Ankle Band
18551-7	S - 4XL	Hi Vis Yellow - Knee Band
18691-7	S - 4XL	Blue - Corprate Only

Colourways:

Yellow	Orange	Blue

Standards:

CE | EN ISO 20471 - 1 | GO/RT 3279 | BS EN 343 - 3 1

EC council directive 89/686/EEC
EN ISO 20471:2013 - High Visibility Warning Clothing for Professional Use
GO/RT 3279:2008 - Rail Industry Standard (Orange Garment Only)
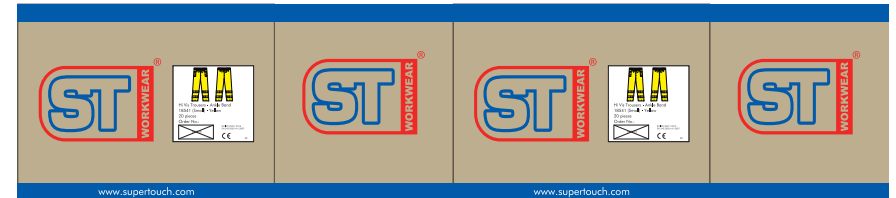BS EN 343:2003+A1:2007 - Protection Against Rain

Size Chart:

Measurements in cm	S	M	L	XL	2XL	3XL	4XL
To fit (A)	71 - 76	81 - 86	92 - 96	102 - 107	112 - 117	122 - 127	132 - 137

Issue No.: 2 **Issue Date: 06/12/2013**

Packaging: 1 piece per bag - 20 bags per bag

Outer Carton Artwork:

www.supertouch.com

Inner Artwork:

DESIGNED TO ENDURE

www.supertouch.com

This range of garments has been designed for durability and comfort. Made to the highest standards, you can be assured that this quality garment will perform exceptionally well even in the most demanding work environment.

Product Name
Product Code: XXXXX
Colour: XXXXX
Size: XXXXX
PO: XXXX   XX

BARCODE

Feature Symbols:

x25 WASHES

Product can be washed 25 times

The information shown on this specification sheet is intended as a guide and is advisory only. All details were correct at the time of issue. As conditions of use are ultimately beyond our control, we advise that the product is tested for the particular application before use.